rocstor®

USB-C Multiport HUB Adapter - 9 Port

User Manual

Y01H01-AG

Upstream:

USB Type-C Male (Connect to host)
• Support DP1.2 Alt mode
Note: To get max bandwidth, the host should support DP1.2 Alt mode

Downstream:

HDMI
• Support max 4K@30Hz
• Support 8/10 bit color depth output
• Support output pixel format RGB/YCbCr4:4:4/YCbCr4:2:2

USB-A X2
• Max 5Gbps data transmission per port
• Support max 7.5W(5V/1.5A) downstream charging the port close to Type-C male another port supports max 900mA downstream charging.
• 2 USB-A share max 1.8A output
• Support short-circuit, over-current, over-voltage protection.

SD/Micro SD 3.0
• Support UHS-I up to 104MBps data rate.
• Allow 2 card slots to work simultaneously.

Type-C (for PD Charging)
• Support max 100W PD charging
• Support PD3.0 Fast Role Swap, the connected device will not get disconnected while plugging in and out PD Adapter
• 15W is dedicated to the functioning of this product, the rest power (max 85W) will be passed to charge for the host.

VGA X1
• Support max 1080P@60Hz output
• Support to output 2 video under SST mode with dual 1080P@60Hz
Note: The max resolution of the display determined by the computer and the monitor.

RJ45 x1
• Support Gigabit Ethernet,10M/100M/1000M
• Support Wake-On-LAN
• Support full duplex flow control
• Light indicator indicates the state, no light when no Internet connected, orange light turns on when network connection is established, green light flashes when transmitting data

3.5mm Audio x1
• Support phone out with digital audio max 96KHz/24bit sampling rate.
• Support Mic in with digital audio max 96KHz/24bit sampling rate.
• DAC SNR MAX 95 dB
• Support CTIA&OMTP auto detection
• Support voice adjustment function when connected to headset.

Congratulation

Thank you for purchasing the Rocstor USB-C Multiport HUB Adapter - 9 Port. For best results and safety, please read these instructions before connecting, operating or using this product. Please keep this manual for future needs.

Introduction

This is a Type-C 9-in-1 multiple ports adapter which provides most advanced, efficient solution to extend a single Type-C port to be multiple ports. It integrates video, data and power ports that allows to connect 2 displays simultaneously for enjoying videos on big screen, connect multiple USB devices for data transmission , connect Ethernet source for getting PC to super high speed network, or connect to headset for enjoy fantastic music. Besides, it has PD charging port which supports max 100W PD charging to support the function of the adapter and charge for the host simultaneously. It can work on all Type-C and ThunderboltTM3 host that supports DP Alt mode.

Package Contents

• 1 x USB-C (9 in 1) Port HUB
• User Manual

How to Use

Plug the USB-C male connector of the Hub into the USB-C port on your USB-C laptop.

System Requirement

Laptop with an available USB-C Port Windows 7/8/10, MacOSX v10.0 or above operating systems, USB 3.0/3.1

Specification

Input / Output Connector	
Input	Type-C Male x1
Output	HDMI x1
	VGA x1
	USB-A Female x2
	RJ45 x1
	SD/Micro SD 3.0 x1
	3.5mm Audio x1
	Type-C Female x 1
Warranty	
Limited Warranty	1 Year
Environmental	
Operating Temperature	0℃ to + 45℃
Operating Humidity	10% to 90 % RH (no condensation)
Storage Temperature	-10℃ to + 70℃
Storage Humidity	10% to 90 % RH (no condensation)
Regulatory Approvals	
Certifications	FCC, CE

Physical Characteristics

dimensions:
4.9" x 2.3" x 0.5" - 125mm x 59mm x 14 mm
Weight:
0.25 lbs - 125gr

4.9"

8.2"

1.5A

2.3"

rocstor

4K/30Hz

0.5"
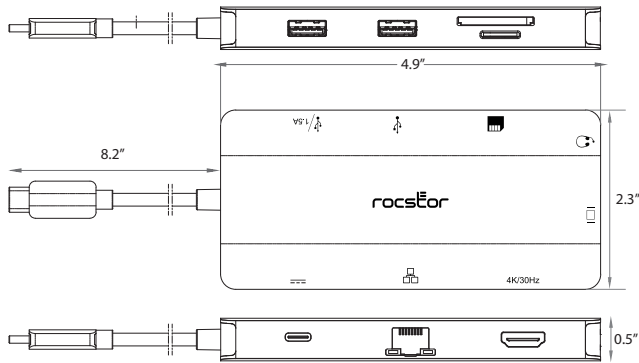
Support

Technical support is available to all the registered users of Rocstor products.

Technical Support / RMA
Hours: 9:00 am - 5:00 pm PST
Monday to Friday (except holidays)

Tell: +1 (818) 727-7000 (National and international)
Fax: +1 (818) 875-0002
Email: support@Rocstor.com